qikFIT TUF




QIKFIT TUF is designed for charging only, no data transfer is possible.


QikFIT TUF is a compact USB A+C fast charging solution, providing a combined 30W of power for fast charging smartphones and tablets.


QikFIT TUF is suitable for panel mounting with builtin mounting clips for tool-less installation in panels up to 3 mm thick. QikFIT TUF can be used on its own or combined with the OE Elsafe QikFIT series to create a range of OE Elsafe rails and panel mounts.

Quick and easy to install, connecting to the power supply via an integrated GST 18/3 male connector. QikFIT TUF can be daisy chained using either OE Elsafe J-Couplers or GST distribution blocks connected to a single starter or from a mains AC socket.



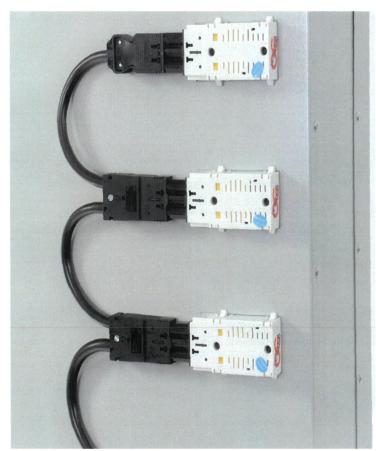







qikFIT TUF TECHNICAL

FEATURES

| QikFIT TUF A+C USB Charger Specifications | |
|---|--|
| USB Charging Outlets (both reversible) | 1 x Type A Female 1 x Type C Female |
| Rated Total Output | 30W Max |
| AC Voltage Range | 100-240V AC 50/60Hz |
| Single C Port Output (PD) | 5V/3A, 9V/2A. 15V/1.7A 20V/1.5A |
| Single A Port Output (QC) | 5V/3A, 9V/2A,12V/1.5A |
| Both Ports Output | 5V/2A (C-Port) +5V/1.5A (A-Port) |
| Standby Power Usage | <0.1W |
| USB Ports (Reversible) | Gold Plated. Min insertions - 5000 for type A Port -10,000 for type C Port |
| Over Current Protection | Yes - Auto Reset |
| Short Circuit Protection | Yes - Auto Reset |
| Operating Temperature | 0 to 25°C |
| Max Relative Humidity | 85% RH |
| Rated Current | 0.8A |

Additional features

- Dynamic voltage adjustment to compensate for cable voltage loss
- LED will be green during Power Delivery / Quick Charge mode. LED will be blue for fast charging.

QIKFIT power, data and AV modules are designed and intended for commercial use only.

Configuration

One Type A (reversible) USB charging port and one Type C (reversible) USB charging port. GST18/3 male power in connector

Construction

Fascia - V0 Polycarbonate

Back - V0 Polycarbonate

Integral Fixings

Panel mount clips for surfaces 1mm - 3mm thick

Colours

Fascia - Black, White, Grey

Quality & Testing

All QikFIT TUF units are manufactured using ISO9001 quality controlled components and practices and are 100% tested before dispatch.

- Visual: Configuration and appearance.
- USB charger: Output voltage and resistance

Safety Certifications

QIKFIT Series Approval No. NSW23497


Safety - IEC62368-1:2014 A11:2017

EMC - EN61204-3: 2018,

OVCIII rated

TUF is safe and designed for public spaces. No data transfer is possible as TUF has no external data connections or the ability to store enough code to put malware on a device.

UNIT DIMENSIONS

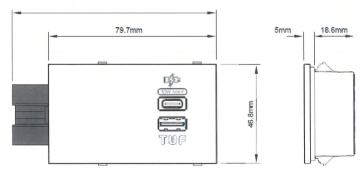

Rated Current 0.8A

